

FEATURE

- Injection-molded thermoplastic ABS housing, UL 94V-0 flame rating.
- Innovative, easy installation in minutes.
- Letters 6" height with 3/4" stroke. Optional RED or GREEN letters.
- SALIDA faceplate available.
- Single or double face(Universal)
- Universal J-box mounting pattern.
- 120V/277VAC Dual voltage operation.
- 2X8pcs ultra bright 2835 SMT LED lamp heads for emergency mode.
- Built-in 3.6V1200mAh NI-MH battery for minimum 90 minutes emergency operation.(JLEC2BCW)
- Built-in 3.6V2400mAh NI-MH battery for minimum 90 minutes emergency operation. (JLEC2BCWRC,Remote capability up to 3W)
- Maximum 24 hours for full recharge time.
- Test switch and charge indicator.
- UL and cULus listed.
- 0° to 40° C indoor damp location listed.

FAMILY: **JLEC2BCW**

NOTES:

TYPE: **BI- COLOR EMERGENCY EXIT SIGN AND COMBO**

FC DOE cULUS RoHS COMPLIANT CEC



*RED&GREEN EXIT 2in1



*Bi-Color Red /Green LED's

ORDERING INFORMATION

FAMILY	LENS	FACEPLATE	HOUSING COLOR	REMOTE CAPACITY
JLEC2	R/G	BLANK(EXIT)	W(WHITE)	BLANK(WITHOUT)
	R/G	SA(SALIDA)	B(BLACK)	RC(WITH REMOTE)

PACKING INFORMATION

MODEL NO.	PACKING INFORMATION	WEIGHTS
JLEC2BCW	50x44x38.5cm/6pcs	11.3/10.3kgs
JLEC2BCWRC	50x44x38.5cm/6pcs	11.4/10.4kgs

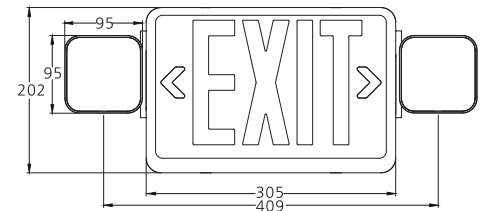

ELECTRICAL INFORMATION

MODEL	RATED VOLTAGE	INPUT CURRENT	INPUT WATT	LED TYPE	CHARGING TIME	EMERGENCY RUN TIME
JLEC2BCW	120/277V	0.031/0.016A	3.5W	2x8pcs ultra bright 2835 SMT LED lamp	24 Hrs	90 Mins
JLEC2BCWRC	120/277V	0.032/0.017A	4W	2x8pcs ultra bright 2835 SMT LED lamp+3W Remote Load	24 Hrs	90 Mins