


# EXIT SIGN



- New slim design exit sign
- PMMA exit panel & ABS housing
- 3 hours maintained operation
- Adjustable bracket for ceiling/wall/side mount application.
- Complies with IEC60598-2-22, ROHS

Dimension:

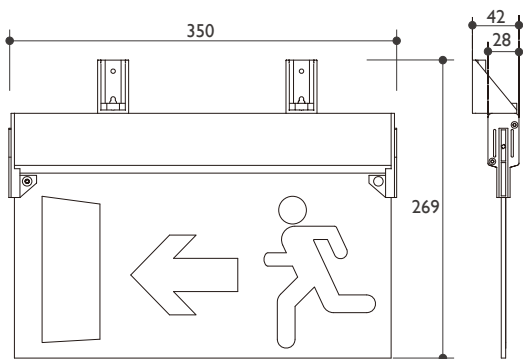

| Specification             |                           |
|---------------------------|---------------------------|
| Model                     | 297                       |
| Mode of operation         | Maintained                |
| Supply Voltage            | 220-240V 50-60Hz          |
| Power Consumption         | 2.5W                      |
| Output Voltage            | 3.6V                      |
| Output Power              | 0.3W                      |
| Lumen Output              | 8.3LM                     |
| Battery                   | 3.6V500mAhNi-Cad Battery  |
| Max Charge Current(mA)    | 106mA                     |
| Max Discharge Current(mA) | 142mA                     |
| Charging Time             | 20H                       |
| Discharging Time          | 6H                        |
| Lamp                      | 5pcs power LED            |
| IP Rating                 | IP20                      |
| Certification             | CE                        |
| Packing detail            | 41X37X25CM/10pcs 8/6.5KGS |